
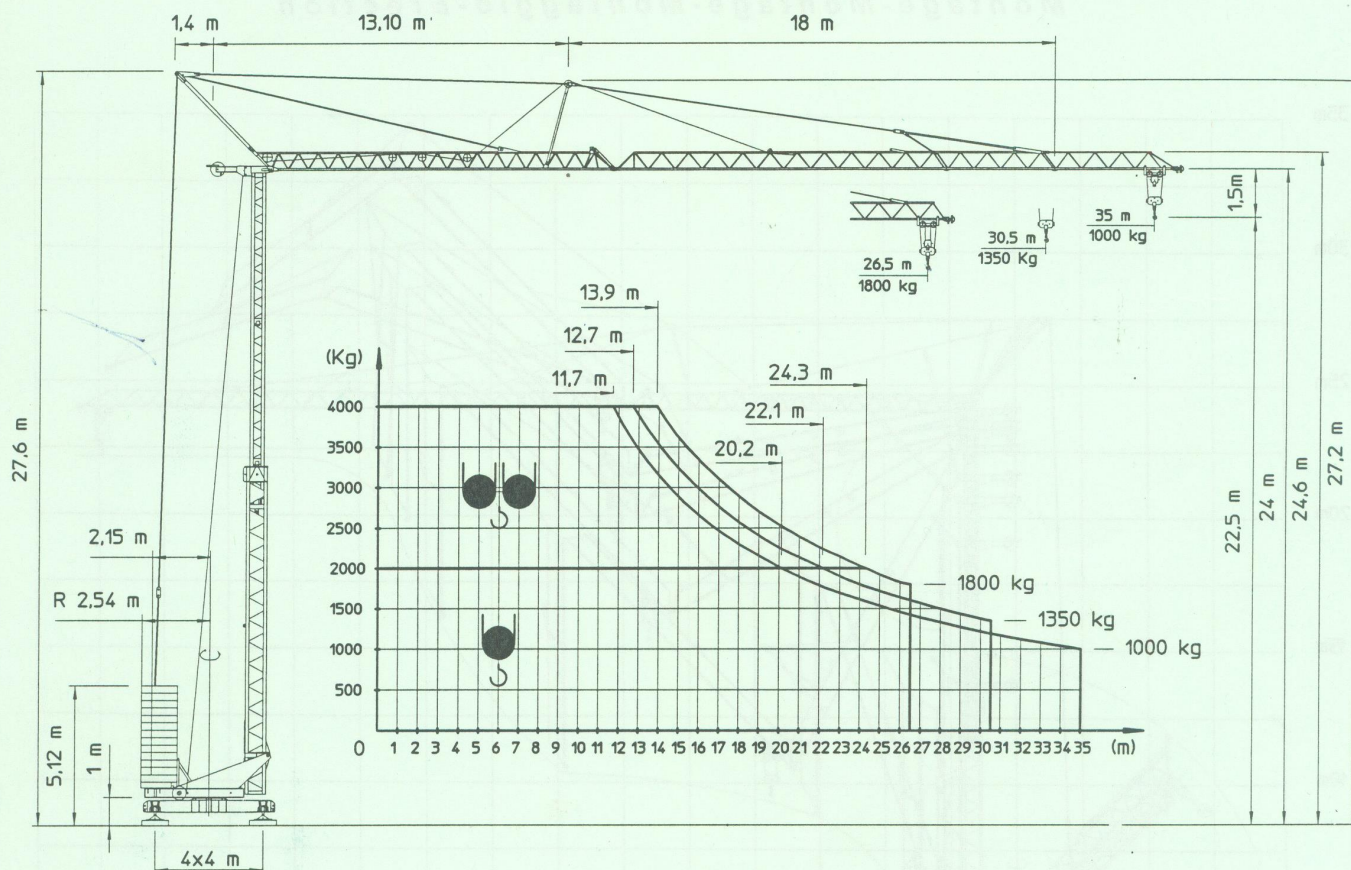


Conducta Eurokran 3510/4



Pesi-Tragkraft	kg	4000	2000	1800		1350		1000
Sbraccio-Ausladung								
 26,5 m	m	13,9	24,3	26,5				
 30,5 m	m	12,7	22,1			30,5		
 35,0 m	m	11,7	20,2					35,0
					36 m/min.	1500 kg		
					18 m/min.	2000 kg		
					4,5 m/min.	2000 kg		
					18 m/min.	3000 kg		
					9 m/min.	4000 kg		
					2,2 m/min.	4000 kg		
 INVERTER		11 / 21 / 42 m/min.						
 INVERTER		0,2 / 0,6 / 0,9 1/min. progr.						
		25 m/min						


Hakenhöhe hauteur s/crochet altezza al gancio height of hook	17,5 m 22,5 m
Abstützung ecartement de voie scartamento wheel gauge (track)	4,0 m
Drehradius rayon de giration arrière raggio di rotazione rotating radius	2,54 m
Konstruktionsgewicht poids de la grue peso della gru structural weight	13,5 t
Gegenballast contre poids zavorra contrappeso counterweight	26,3 t
Eckdruck pression d'angle pressione su uno stabilizzatore corner pressure	24,1 t
Gesamt-Motorenleistung puissance totale des moteurs forza motrice totale total motor output	19 kW
Kabelquerschnitt section du cable sezione del cavo sottogomma cable section	4x16 mm ²

Conducta I-36015 Schio (VI)
Telefono 0445 57 62 29
Telefax 0445 57 53 20


Konstruktionsänderungen vorbehalten !
Sous réserves de modifications !
Si riservano modifiche !
Subject to alterations !

Conducta Eurokran 3510/4

Montage-Montage-Montaggio-Erection

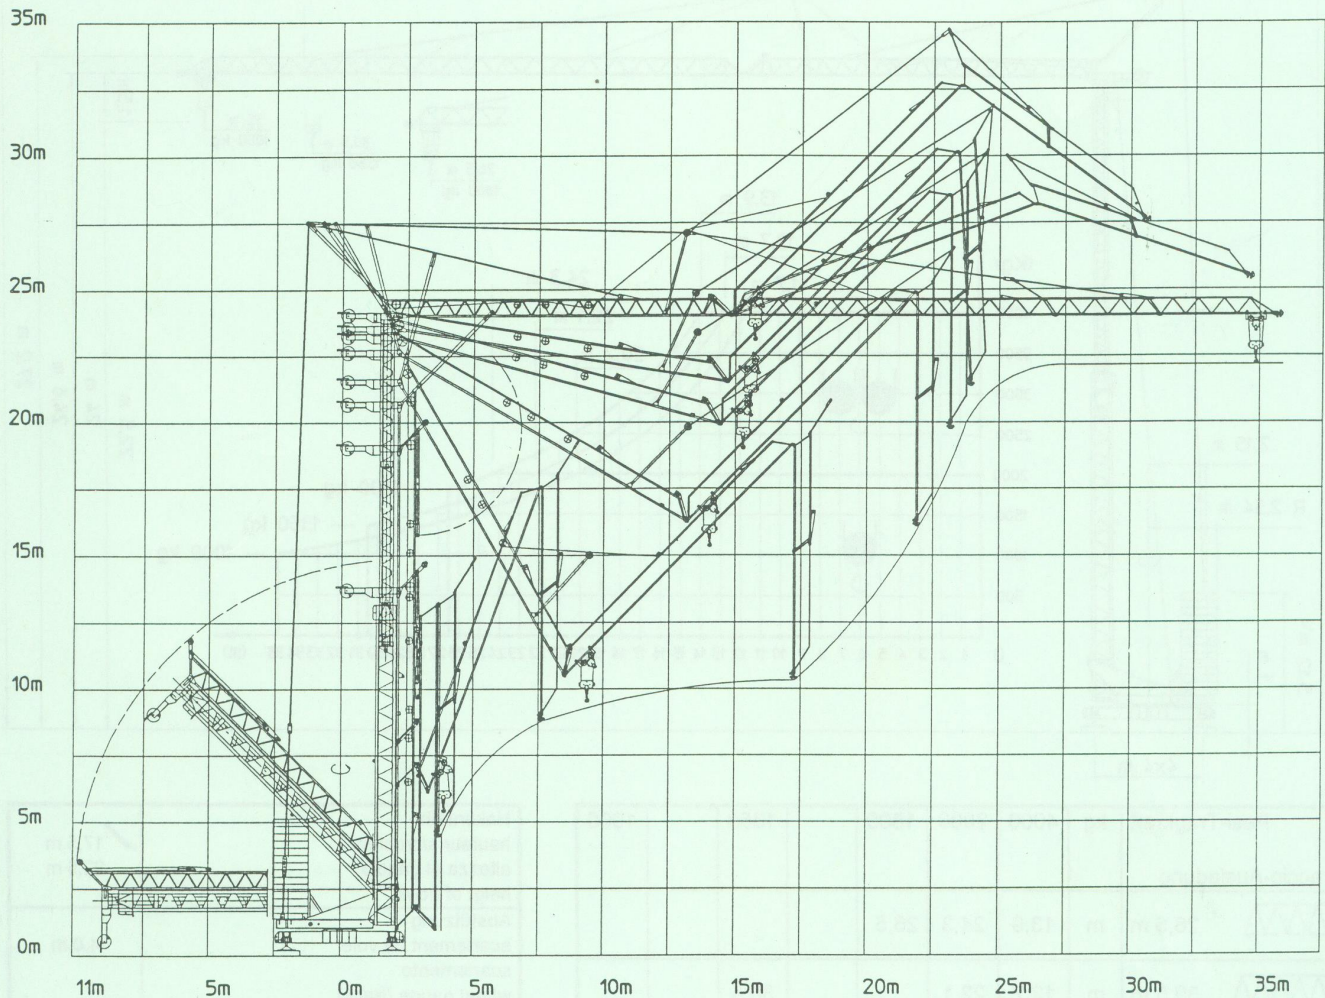

Transport-Transport-Trasporto-Transport

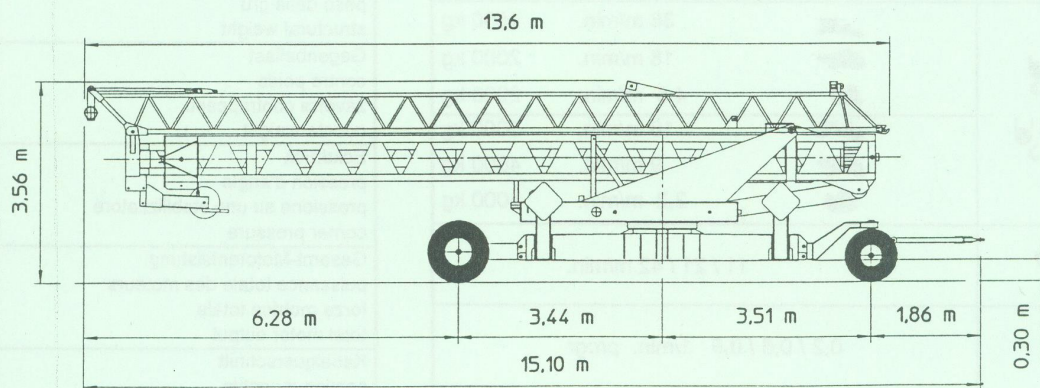

Conducta I-36015 Schio (VI)
 Telefono 0445 / 57 62 29
 Telefax 0445 / 57 53 20

Konstruktionsänderungen vorbehalten !
 Sous réserves de modifications !
 Si riservano modifiche !
 Subject to alterations !